


- - - - - dyneema 1,5 / 0,058 " **—** superaram 2,3 mm / 0,09 "
 ——— dyneema 1,1 / 0,04 " **—** superaram 1,7 mm / 0,06 "

ELLE 38

All lengths in centimeters
 1 cm = 0,39 "

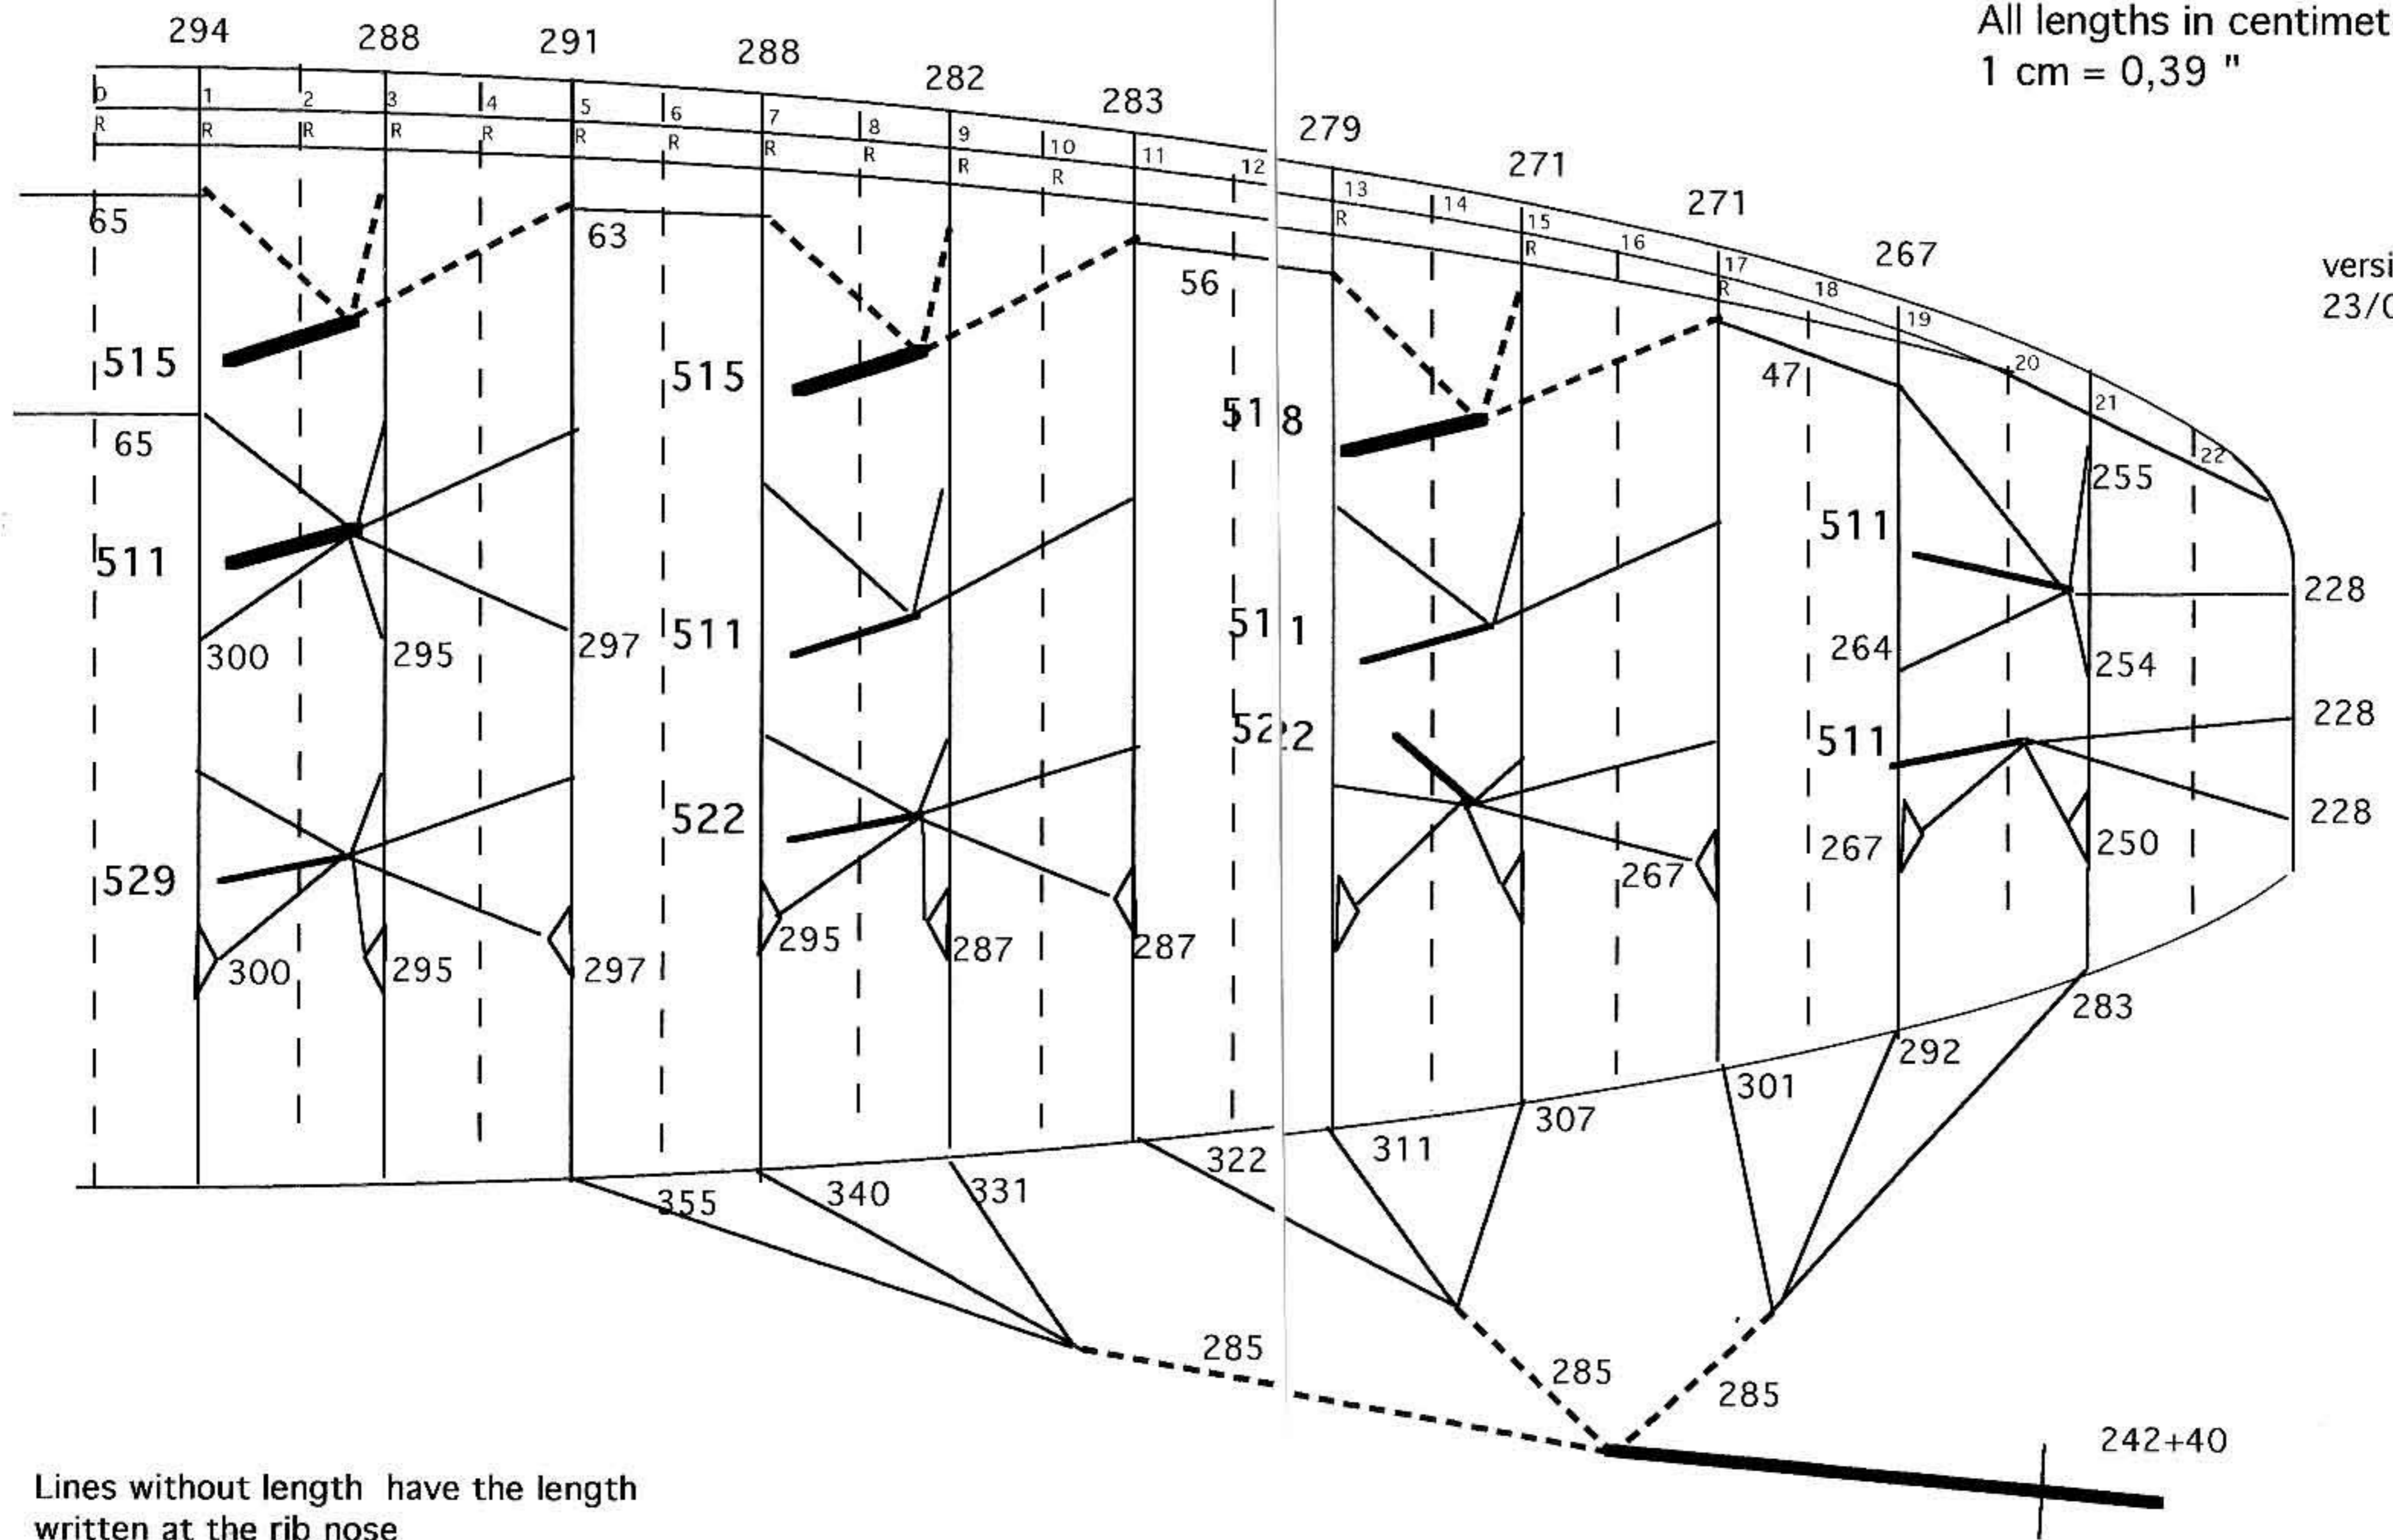

version
 23/06/98

Lines without length have the length
 written at the rib nose

Caractéristiques Techniques et Performances

Technical features and performance

elle Surface - Area (m²)

Poids - Weight (kg)

Envergure - span (m)

Allongement - aspect ratio

Corde max - root cord : (m)

P.T.V. - all up weight: (kg)

C.U. opt. Optimal Loading: (kg)

38	42
8	9,6
13	14
4,7	4,7
3,57	3,84
110 -180	150 - 220
140	180

Performances* (± 2 km/h)

Vit. max (acc)-Max Speed (untrimmed)

Vit. (bras hauts) - speed "hands high"

Vit. min (décroch.) - Min. speed (stall)

Finesse maximale - Max. glide ratio

Taux de chute mini - Min sink rate m/s

vol libre	paramoteur
44	48
36	43
22	26
7,4 (±0,2)	
1,2 (±0,2)	

* Mesures effectuées vers 1000 m d'altitude.

* Measured at an altitude of 1000 m